


HUNGAROFFLASH

RAINPROOF

15 000 Watts!

15 000 Watts!

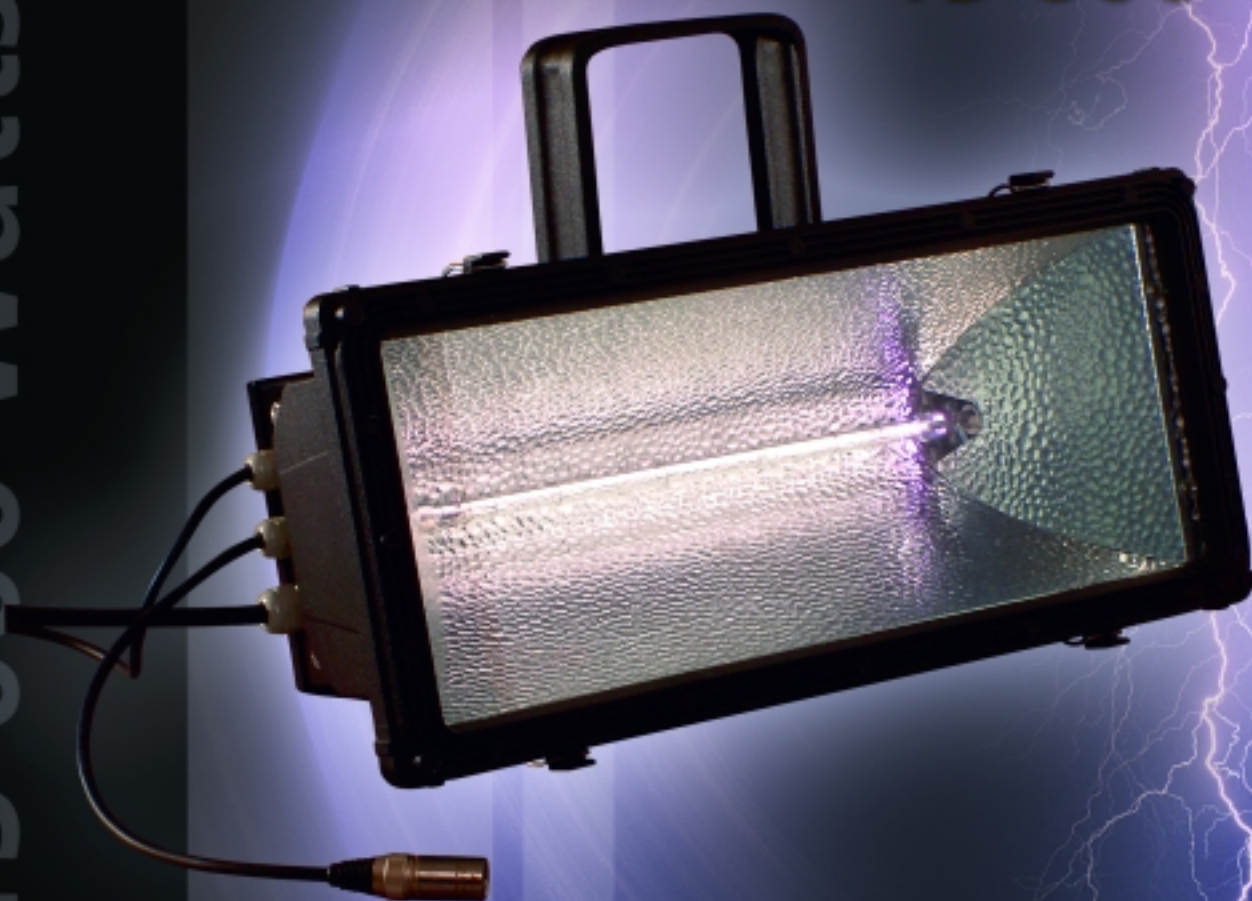

NEW SOFTWARE  
Order now!

W A T E R P R O O F

[www.hungaroflash.com](http://www.hungaroflash.com)

T H E F L A S H P R O D U C E R



# HUNGAROFFLASH

# RAINPROOF

IP 65!

The WATERProof Quasar® is a very versatile product that, just trying to imagine all that you can do with it would be a difficult task. Very few companies manufacture strobes for water/rainproof applications.

We are offering a high power QUASAR that is both waterproof and suitable for rainy applications. The WaterProof Quasar can be controlled in DMX and its versatile aluminum lamp body can hold any of our strobe products including RGB and dichroic color filters.

HIGH-INTENSITY FLASH TUBE

CAUTION! LIGHT FLASHES OF VERY HIGH INTENSITY! 15,000 WATTS!

Not only is it powerful, it is also easy to maintain. Just click open the clamps and the lamp is immediately accessible.

See more details on the QUASAR® page



#### NAME:

#### LAMP:

Maximum continuous flash discharge:  
Frequency of continuous mode:  
Flash tube type:  
Colour temperature:

WaterProof Quasar  
450.000 LUMEN  
57000 Joules  
100/120 Hz  
special QUASAR® tube  
6000° Kelvin

#### PERFORMANCES:

Intensity control:  
Adjustable flash frequency:  
Power draw in TURBO mode:  
Maximum power draw in CONTINUOUS mode:

0-100 %  
0-20/24 Hz  
6 kW  
15 kW

#### ELECTRONIC & SAFETY DEVICES:

Electronic overdrive protection:  
Overheating protection:  
SELF-TEST:  
Indicator LED S:

new intelligent soft protection software  
110 °C, self resetting  
preprogrammed 1  
Red: POWER  
Yellow: MODE/PROTECTION  
Green: DATA

#### CONTROLL SYSTEM:

2 Channel:

Nr. of addressable DMX starting addresses:  
Connection type:  
Controllability:

DMX mode 1st.: frequency 2 nd: intensity  
HF mode 1st.:intensity 2 nd: duration  
max. 511  
cable  
DMX 512, HF protocol

#### POWER SUPPLY:

(with 3x20 A, C or D type):  
Nominal mains voltage:  
CONTINUOUS  
TURBO

230/240 V - 50/60 Hz  
60A (3.5 sec)  
32A (11.5 sec)

#### FIXTURE & HOUSING:

Protection from breaking flash tube  
Fixing  
Corrosion protection  
Strobe weight: (500\*250\*275)  
Box size: (510\*270\*310)

protective grid  
adjustable swivel  
electrostatic sintering  
9.5 kg  
9.8 kg

Technical specifications

[www.hungaroflash.co.uk](http://www.hungaroflash.co.uk)

T H E F L A S H P R O D U C E R